




DESKTOP POWER DRIVER
Class 2 Power Supply 12V / 60W

Part # 950036-12-060

Job Information <i>Fill out project details for this product below</i>			
Project		Location	
Contact		Date	
Product Number		Fixture Type	

Essential plug and play power supply designed for compatibility with Omnify products. UL Class 2 certified and may be used virtually worldwide with a change to the AC power cord.

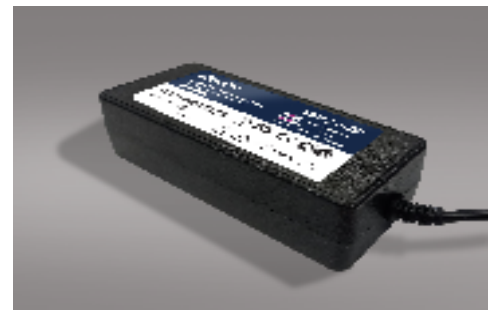

KEY FEATURES



High Reliability



Over 87% Efficiency



Class 2 Driver

APPLICATIONS

- Backlighting
- Large Formats
- Backlit Stone
- Backlit Graphics

OVERVIEW



- Universal AC input (100 - 240V)
- Over voltage Protection
- Short Circuit Protection



Plug-in Power Driver



DESKTOP POWER DRIVER
Class 2 Power Supply 12V / 60W

Part # 950036-12-060

SPECIFICATIONS

Model #	ZF120A-1205000
Part Number	950036-12-060
Output	
DC Voltage	12V
Rated Current	5A
Rated Power	60W
Efficiency	≥ 87% 115Vac/60Hz, 115Vac/50Hz, 230vac/60Hz, 230vac/50Hz
Withstanding Voltage	1KV (line to line)
Isolation Resistance	> 10 M.Ω
Input	
Voltage Range	90Vac-264Vac
Frequency Range	47Hz-63Hz
Input Current Limit	< 0.6A (rms) at 100 to 240 Vac
No Load Power Consumption	< 0.21W
Max. Input Power Consumption	< 72 W
Inrush Current (Typ.)	≤50/80 A under cold start , 1st half cycle of 115/230 Vrms
Protection	
Short Circuit	Output Short HICCUP
Over Current Protection	6.5A-8.5A HICCUP
Environment	
Working TEMP.	0 C° ~ 40 C°
Rated Max. TEMP	45 C°
Working Humidity	5% ~ 95% RH, Full load, Normal operating
Wiring	
DC Output Wire	20 AWG UL Approved • 1.2 m Length • DC Barrel Connector 5.5 (mm)x 2.1 (mm)
AC Inlet	2 pin, C8 • Class II • UL approved • AC cord included
Others	
Net. Weight	0.758lbs (including AC cord)
Size	114mm x 50mm x 31mm




DESKTOP POWER DRIVER
Class 2 Power Supply 12V / 60W


Part # 950036-12-060

OVERVIEW

DIMENSION

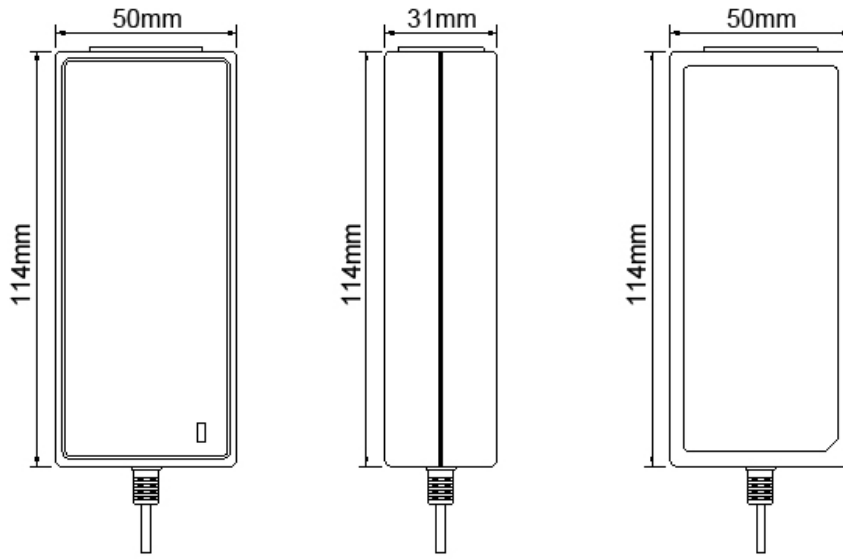

DC OUTPUT CORD DRAWING

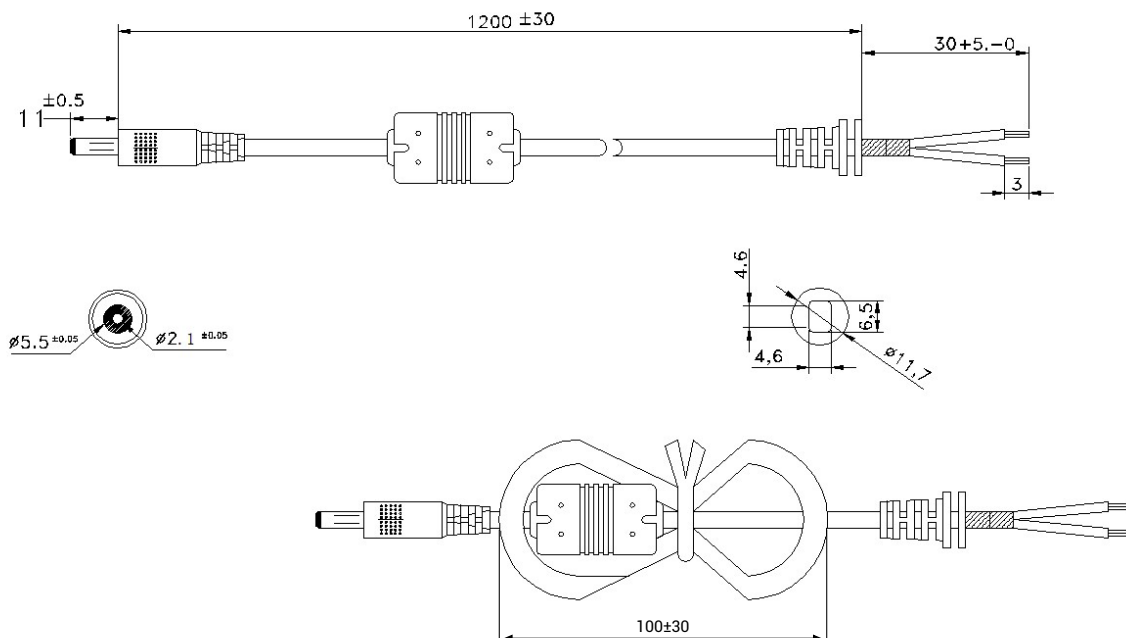



Plug-in Power Driver



DESKTOP POWER DRIVER
Class 2 Power Supply 12V / 60W

Part # 950036-12-060

ORDER INFORMATION

Product #	Voltage	Wattage
950036	12-12V DC	060 60 W

EXAMPLE

950036-12-060

The specification number immediately above can be deconstructed as follows:

12V 60W Class 2; Voltage-12V;Wattage-60W



DESKTOP POWER DRIVER
Class 2 Power Supply 12V / 60W

Part # 950036-12-060

INSTALLATION

1. A 3 Core power cord is required, which has AC connector mating with IEC320 C13/C14 inlet of Unit.
2. Connect LED module with DC output connector according to the install manual provided by LED module or LED light supplier.
3. When installation is complete, switch on the mains supply.
4. Do NOT connect LED load(LED module) exceeding total 96W. It may cause over load problem.

Read these instruction carefully. If any doubt, consult a qualified electrician.

SAFETY WARNING UNDER UL FOR USA MARKET

For USA market under UL1310, Cord-connected Type Class 2 Power unit.

CAUTION

RISK OF ELECTRIC SHOCK, DRY LOCATION USE ONLY.

Risk of equipment or circuit damage.

- Disconnect test leads from any circuit being tested before changing functions.
- Always disconnect the live test lead before disconnecting the common test lead.
- Do not create an electrical connection between battery terminals with a jump wire or tools.
- Do not ground any electrical terminal that has or may have power.
- Always unplug equipment from an electrical outlet when not in use.
- Never use the cord to pull a plug from an outlet. Grasp the plug and pull it to disconnect.
- If an extension cord is necessary, a cord with a current rating equal to more than that of the equipment should be used. Cords rated for less current than the equipment may overheat.
- Loop cord or cables loosely around equipment when storing.
- Use tools only as described in the tool user's manual.
- Use only the manufacturer's recommended attachments.

For connection to a supply not in the U.S.A, use an attachment plug adaptor of the proper configuration for the power outlet.



Important safety instruction - Save these Instructions.

Danger - to reduce the risk of fire or electric shock, carefully follow these instructions.

WARNING



RISK OF FIRE.

- Do not overload electric outlet and circuit
- Inspect wiring & plug on power supply to ensure no damage. Discontinue use if a frayed cord or loose prongs on a plug is discovered
- Do not disassemble, modify or repair the power supply or touch the interior of the power supply
- Do not allow any pieces of metal or conductors or any clippings or cuttings resulting from installation work to enter the power supply
- Do not install product in an environment outside the listed ambient temperature
- Install in a well-ventilated area free from explosive gases and vapors.
- Ensure a compatible LED fixture with the correct operating voltage is installed with this product.

RISK OF ELECTRIC SHOCK.



- Do not attempt to disassemble any battery or remove any component projecting from or protecting the battery terminals.
- Prior to recycling, protect exposed terminals with heavy insulating tape to prevent shorting.
- Use extreme caution when working with circuits that have greater than 40 volts DC or 24 volts AC.
- Do not use electrical equipment on wet surfaces or exposed to rain.
- Always wear properly rated rubber insulated gloves when required or appropriate, particularly when working with voltages exceeding 40 volts DC or 24 volts AC.
- Do not use electrical equipment with damaged cords, damaged cables, or equipment that has been dropped or damaged until a qualified service person has examined it.

Electric shock can cause injury.



DESKTOP POWER DRIVER
Class 2 Power Supply 12V / 60W

Part # 950036-12-060

AC POWER PLUGS GUIDE (FOR REFERENCE ONLY)



USA



UK/Singapore



Europe/Korea



Japan



H.K./South Africa



Switzerland



Italy/Chile



Israel



India



Australia



China



Argentina